

Speco Technologies' PAP160A is a high-powered, portable, self-amplified sound system and is the ideal solution for classrooms, training rooms, auditoriums, houses of worship, traveling presenters and much more. The unit contains a 12" woofer and 1.4" tweeter with a built-in 380W amplifier, iPod® Dock and USB MP3 player.


PAP160A

Features

- 1) USB Connector & power: Connect Flash drive with MP3 files for play via built-in MP3 player (#10). MP3/iPod® input can also be turned on/off.
- 2) MP3/iPod® level: Controls the volume level of the MP3 (#10) or iPod®.
- 3) MIC Input: Connect a dynamic microphone through either 3-pin XLR connector or 1/4" jack
- 4) MIC level: Control volume of microphone connected via MIC input (#3).
- 5) Line Input: Connect device with line level output such as CD player, tuner or mixer through either RCA balanced input or 3-pin XLR.
- 6) Line Input Level: Control volume level of the Line input (#5).
- 7) Output: Send output signal to another amplifier or to another PAP160A.
- 8) Bass & Treble: Control the low & high level frequency tone levels.
The range is selectable between -12dB to +12dB.
- 9) iPod® Dock: Dock is designed for classic style iPod® (*not included*).
Dock will play output from an iPhone® or iTouch® but will not charge those units.
- 10) MP3 Player & Controls: Display information for any MP3 files connected via the USB input (#1). There are 5 control buttons (from left to right):
 - a. Play/Pause
 - b. Stop
 - c. Play options: Random (default): Play the songs on the drive in a random order once through, Repeat One: Repeat the current song & Repeat All: Continue to randomly play all songs.
 - d. Reverse: One quick press & release will go to the previous song. Holding the button down will rewind through the current song.
 - e. Forward: One quick press & release will go to the next song. Holding the button down will forward through the current song.
- 11) Power LED: Lights when device is ON.
- 12) Clipping LED: Lights when applied input signal reaches distortion.
Reduce input level in order to eliminate distortion.
- 13) Main Power Supply: Power cable connection.
- 14) Power Switch: Turns unit on/off.



(easy carrying handle)

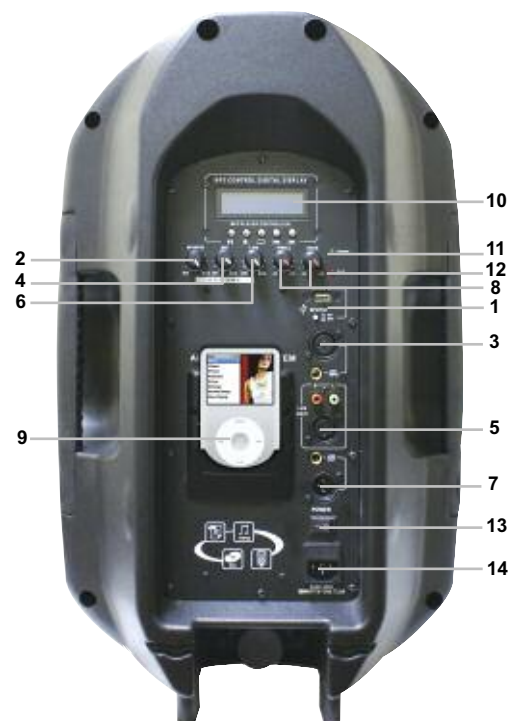

(rear of unit - iPod® not included)

Specifications

- 12" 2-way active molded speaker cabinet
- USB MP3 player with LCD display
- iPod® Classic Dock (See #9 above for restrictions)
- Frequency Response: 40-17KHz
- Sensitivity: 96±2dB (1W/1m)
- RMS/Max Power: 160/380Watts
- Woofer: 12" Polypropylene, 65mm Voice coil, 50oz. magnet, 4Ω
- Tweeter: 34mm Titanium, 8Ω
- Voltage: 110V AC 50~60Hz
- Dimensions: 17.5" W x 14" D x 25.2" H
- Weight: 35 lbs. with carrying handle

Speco Technologies is constantly developing product improvements.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 6/3/10

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880

www.specotech.com